


T:1.6 Dimensions of PC board holes  
Tolerance : ±0.1(Printed-top view)

Specifications  
Current Rating: 1A  
Voltage Rating: 12V DC  
Contact Resistance: 50m ohm. Max.  
Insulation Resistance: 100M ohm. min.  
Withstanding Voltage: 500V AC For One Minute  
Operating Temperature Range: -25°C ~ +85°C

Material And Finish  
Insulator: PA10T UL94V-0 Black  
Contact: Brass or Phosphor Bronze  
Plating: Silver over Nickel

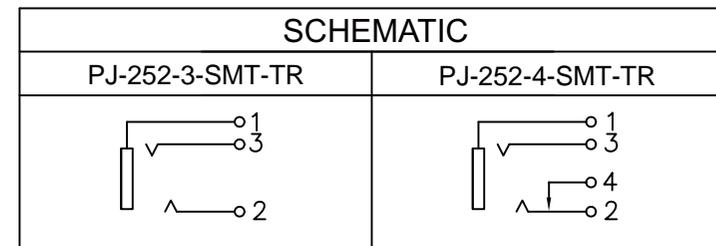


UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.2

**AAA**CONN

**RoHS Compliant**

TOLERANCES ARE

DRAWING BY	X. ±
CHECKED BY	.X ±
UNIT / mm	.XX ±
SCALE 1 : 1	.XXX ±
DATE	ANG ±
SIZE A4	PJECTION



ORDER INFORMATION

PJ-252-x-SMT-TR

SERIES

PACKAGING: TR = TAPE & REEL

SMT 90°

SWITCH OPTIONS: 3 = NO SWITCH, 4 = TIP SWITCH

AAA (HK) Electronics Co., Ltd.

www.aaaconnectors.com

Description: 2.50mm Headphone Phone Jack Stereo Connector SMT