


**Specifications**  
 Current Rating: 0.5A AC/DC  
 Voltage Rating: 40V AC/DC  
 Contact Resistance: 30m ohm. Max.  
 Insulation Resistance: 100M ohm. min.  
 Withstanding Voltage: 500V AC For One Minute  
 Operating Temperature Range: -30°C ~ +85°C

**Material And Finish**  
 Insulator: Thermoplastic(LCP) UL94V-0 Black  
 Contact: Brass or Copper Alloy  
 Plating: Gold Plated on Contact Area, Tin Plated on Solder Tail.  
 Shell: Brass or Copper Alloy, Nickel Plated

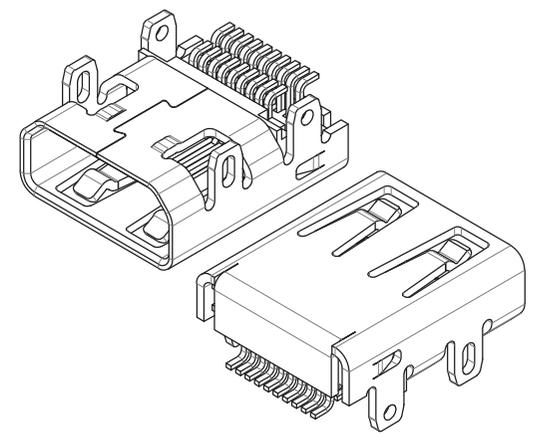

**AAA**CONN

AAA (HK) Electronics Co., Ltd.  
 www.aaaconnectors.com

**RoHS Compliant**

DRAWING BY		X. ± .X ±
CHECKED BY		
UNIT / mm	SCALE 1 : 1	.XX ± .XXX ± ANG ±
DATE		
SIZE A4	PPOJECTION	



**ORDER INFORMATION**

HDMI-M-H-SMT19-x-x		
SERIES		CONTACT PLATING: 1=GOLD FLASH, 2=15u" GOLD, 3=30u" GOLD
		SHELL & CONTACT: 1=BRASS, 2=COPPER ALLOY
		SMT 19 POSITION
		HORIZONTAL 90°

Description: HDMI - Micro Receptacle Connector 19 Position Surface Mount, Right Angle; Through Hole