
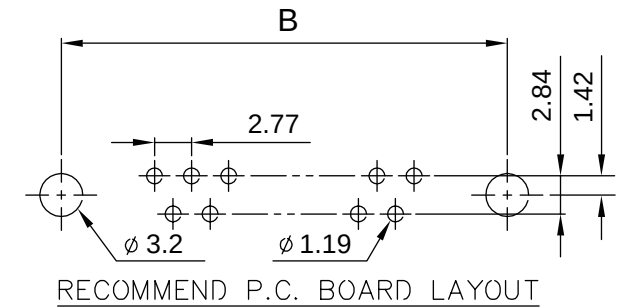
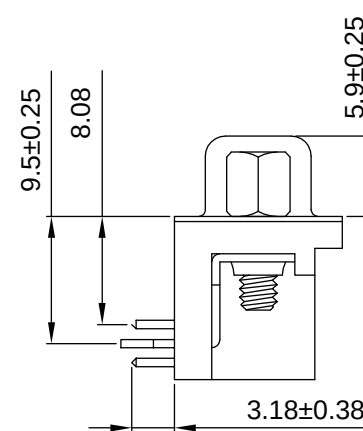
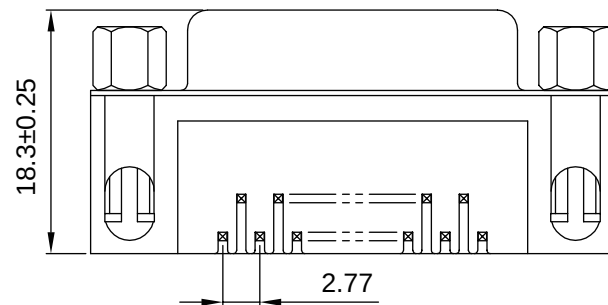


1. Insulator: P.B.T UL 94V-0
2. Contact: Brass or Copper Alloy
3. Shell: Cold Rolled Steel

1. Current Rating: 5 A
2. Withstanding Voltage: 1000V AC/Minute.
3. Contact Resistance: 15 mOhm max.
4. Insulation Resistance: 1000 Mohm min.
5. Operating Temperature: -55°C to 105°C (upto +125°C for high temp)

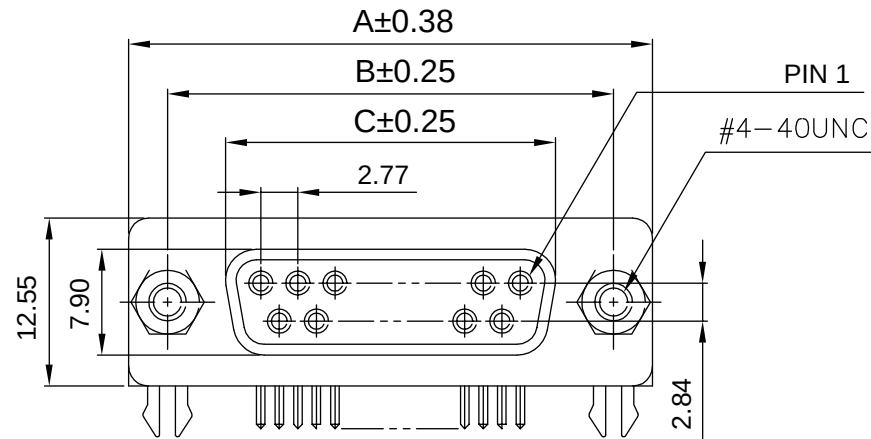

POS.	A	B	C
9	30.81	24.99	16.30
15	39.14	33.32	24.65
25	53.04	47.04	38.40
37	69.32	63.50	54.80

AAACONN

AAA (HK) Electronics Co., Ltd.

www.aaaconnectors.com

RoHS Compliant

DRAWING BY

CHECKED BY

UNIT / mm


SCALE 1 : 1

DATE _____

	ANG I
--	-------

TOLERANCES ARE

X, ±
 .X ± 0.20
 .XX ± 0.10
 .XXX ±
 ANG ±



ORDER INFORMATION

182-FD440-xx-xx-xx

SERIES FEMALE

H: HIGH TEMP INSULATOR
 INSULATOR COLOR: 1=BLACK, 2=BLUE, 3=WHITE
 CONTACT PLATING: 1=GOLD FLASH, 2=30u" GOLD
 1: CONTACT BRASS
 2: CONTACT COPPER ALLOY
 POSITIONS
 4-40 HEX STANDOFF FEMALE SCREWLOCK
 DIP SOLDER

D-Sub Connector Receptacle Female Sockets R/A DIP Solder 4-40 Female Screwlock