

- Material:**
1. Insulator: P.B.T UL 94V-0
 2. Contact: Brass or Copper Alloy
 3. Shell: Cold Rolled Steel
- Specifications:**
1. Current Rating: 5 A
 2. Withstanding Voltage: 1000V AC/Minute.
 3. Contact Resistance: 15 mOhm max.
 4. Insulation Resistance: 1000 mOhm min.
 5. Operating Temperature: -55°C to 105°C (upto +125°C for high temp)

POS.	A	B	C
9	30.80	24.99	16.92
15	39.14	33.32	25.25
25	53.04	47.04	38.96
37	69.32	63.50	55.40

AAACONN


AAA (HK) Electronics Co., Ltd.

www.aaaconnectors.com


RoHS Compliant

TOLERANCES ARE

DRAWING BY	X, ±
CHECKED BY	.X ± 0.30
UNIT/mm	.XX ± 0.15
SCALE	.XXX ±
DATE	ANG ±
SIZE A4	P PROJECTION



ORDER INFORMATION

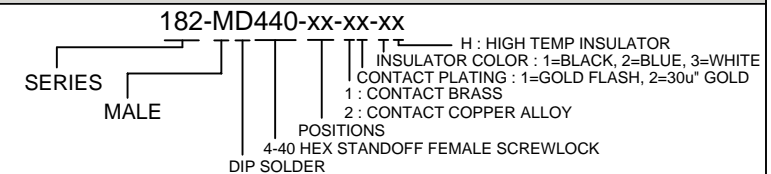

D-Sub Connector Plug Male Pins R/A DIP Solder 4-40 Female Screwlock