
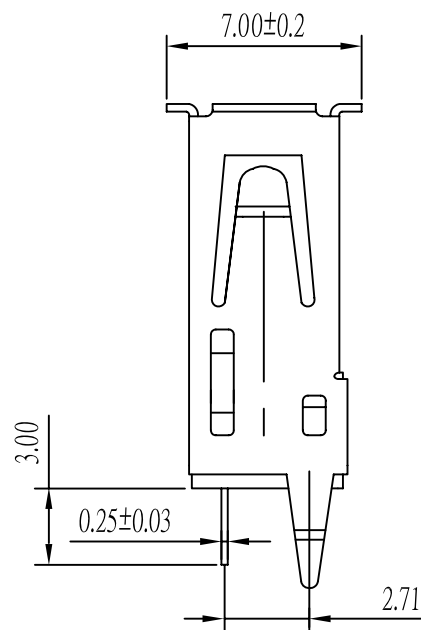
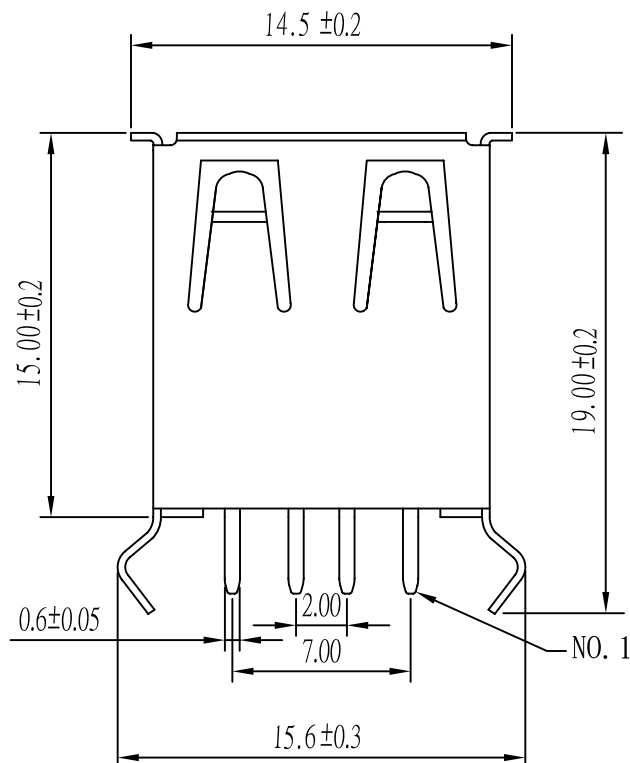


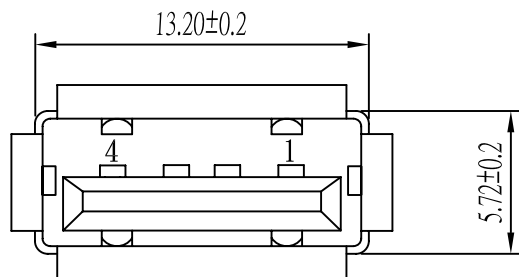

Specifications

Current Rating: 1.5A AC/DC

Voltage Rating: 30V AC/DC

Contact Resistance: 30m ohm. Max.

Insulation Resistance: 1000M ohm. min.

Withstanding Voltage: 500V AC For One Minute

Operating Temperature Range: -55°C ~ +105°C


Material And Finish

Insulator: PBT+30%GF UL94V-0

Contact: Brass or Copper Alloy

Plating: Gold Plated on Contact Area, Tin Plated on Solder Tail.

Shell: Brass or Copper Alloy, Nickel Plated

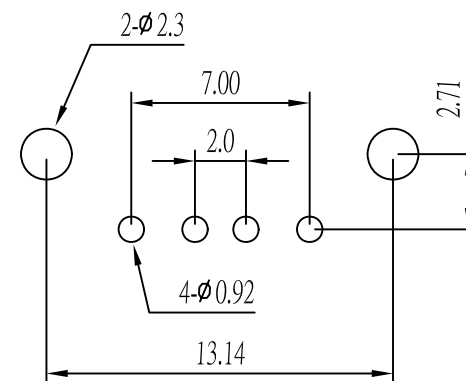

P.C.B. LAYOUT

AAACONN

AAA (HK) Electronics Co., Ltd.

www.aaaconnectors.com

RoHS Compliant

TOLERANCES ARE

DRAWING BY

X.±

CHECKED BY

.X.±

UNIT / mm

SCALE 1 : 1

.XX.±


DATE

.XXX.±

SIZE A4

PPOJECTION

ANG.±



ORDER INFORMATION

USB-A-V-4-x-x

SERIES

INSULATOR COLOR: 1=BLACK, 2=WHITE, 3=BLUE, 4=BEIGE

SHELL & CONTACT: 1=BRASS, 2=COPPER ALLOY

4 POSITION

VERTICAL 180°

Description: USB-A (USB TYPE-A) USB 2.0 Receptacle Connector 4 Position Through Hole