

## SPECIFICATIONS

- ① Housing Material: Polyamide 66(UL94V-0)
- ② Screw: M2.0 Yellow Zinc Plated Steel
- ③ Cage Clamp: Tin Plated Brass
- ④ Terminals: Tin Plated Brass or Copper Alloy

Screws Torque: 1 In-Lb





Wire Range: 16~26 AWG

Rated: 10 Amperes.AC300V

Operation Temperature: -55°C~+115°C

Insulation withstands volt: AC2000V min

Insulation resistance: >1000MΩ or more at DC500V

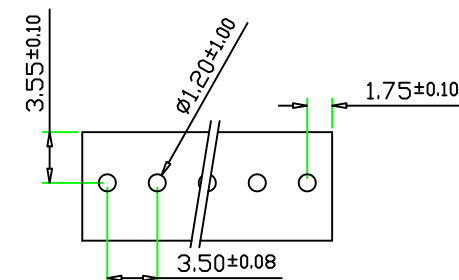

Tolerance ± 0.5

<b>POLE</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>	<b>9</b>	<b>10</b>	<b>11</b>	<b>12</b>				
<b>A</b>	7	10.5	14	17.5	21	24.5	28	31.5	35	38.5	42				
<b>B</b>	3.5	7	10.5	14	17.5	21	24.5	28	31.5	35	38.5				
<b>POLE</b>	<b>13</b>	<b>14</b>	<b>15</b>	<b>16</b>	<b>17</b>	<b>18</b>	<b>19</b>	<b>20</b>	<b>21</b>	<b>22</b>	<b>23</b>	<b>24</b>	<b>25</b>	<b>26</b>	
<b>A</b>	45.5	49	52.5	56	59.5	63	66.5	70	73.5	77	80.5	84	87.5	91	
<b>B</b>	42	45.5	49	52.5	56	59.5	63	66.5	70	73.5	77	80.5	84	87.5	

# AAA

**RoHS Compliant**

TOLERANCES ARE

DRAWING BY

X. ±

CHECKED BY

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±


DATE

.XXX ±

SIZE A4

PJECTION

ANG ±



### ORDER INFORMATION

TBHB-350-xx-xx

SERIES

INSULATOR COLOR : 1=GREEN, 2=BLACK, 3=BLUE, 4=GREY

CONTACT : 1=BRASS, 2=COPPER ALLOY

POLES : 02-26

PITCH : 3.50mm

Description: Wire to Board Terminal Block Horizontal with Board 3.50mm Through Hole

AAA (HK) Electronics Co., Ltd.

www.aaaconnectors.com