
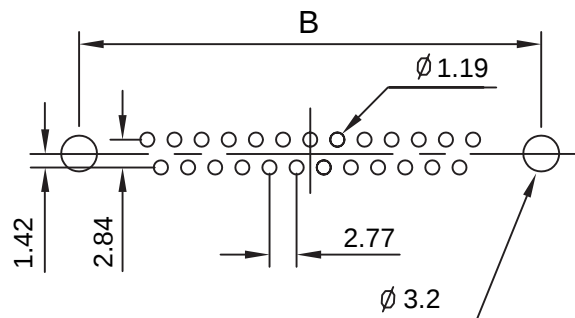


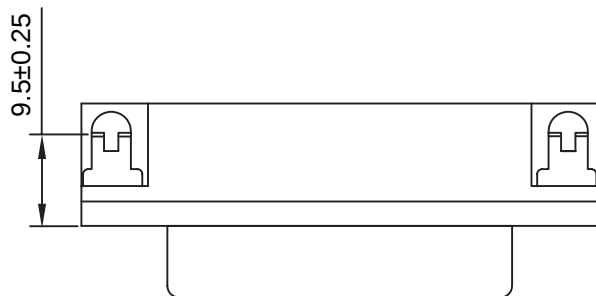



P.C.B. LAYOUT

Material:

1. Insulator: P.B.T UL 94V-0
2. Contact: Brass or Copper Alloy
3. Shell: Cold Rolled Steel

Specifications:

1. Current Rating: 5 A
2. Withstanding Voltage: 1000V AC/Minute.
3. Contact Resistance: 15 mOhm max.
4. Insulation Resistance: 1000 mOhm min.
5. Operating Temperature: -55°C to 105°C
(upto +125°C for high temp)

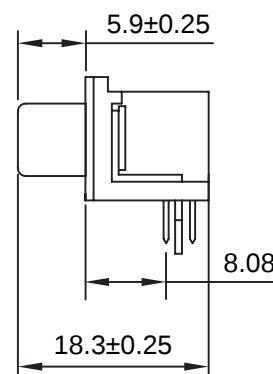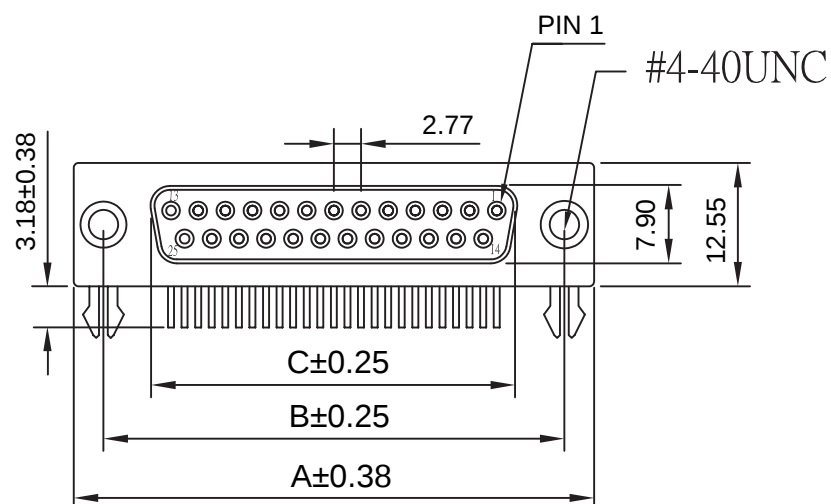

POS.	A	B	C
9	30.81	24.99	16.30
15	39.14	33.32	24.65
25	53.04	47.04	38.40
37	69.32	63.50	54.80

AAACONN

AAA (HK) Electronics Co., Ltd.

www.aaaconnectors.com


RoHS Compliant

TOLERANCES ARE

DRAWING BY	X. ±
CHECKED BY	.X ± 0.30
UNIT / mm	.XX ± 0.20
SCALE 1 : 1	.XXX ± 0.10
DATE	ANG ±

SIZE A4

PPOJECTION



ORDER INFORMATION

182-FD-xx-xx-xx

SERIES FEMALE POSITIONS DIP SOLDER

TH : HIGH TEMP INSULATOR
INSULATOR COLOR : 1=BLACK, 2=BLUE, 3=WHITE
CONTACT PLATING : 1=GOLD FLASH, 2=30u" GOLD
1 : CONTACT BRASS
2 : CONTACT COPPER ALLOY

Description: D-Sub Connector Receptacle Female Sockets R/A DIP Solder