
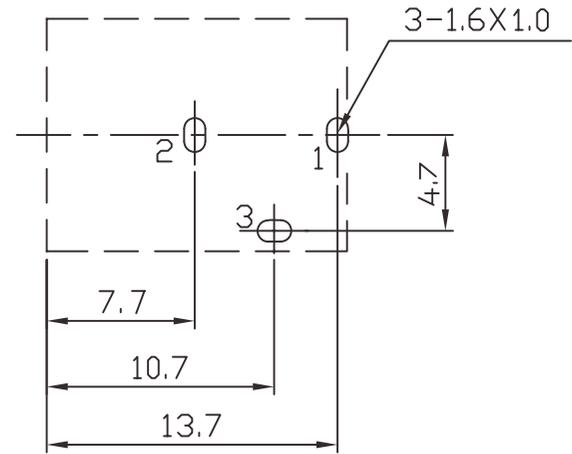
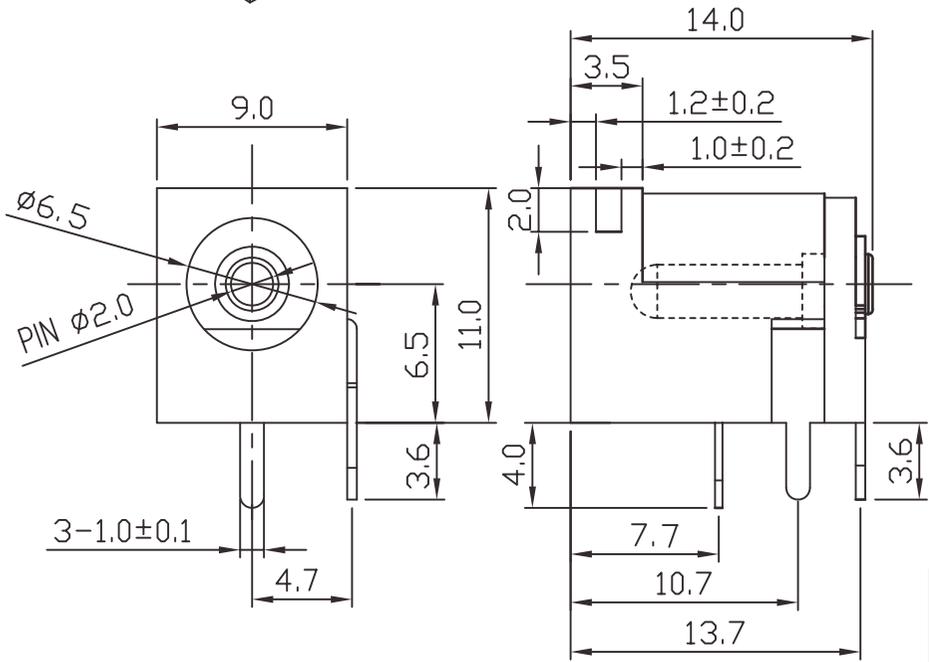


PIN	Ø2.0
-----	------



T:1.6 Dimensions of PC board holes
Tolerance : ±0.05(Printed-top view)

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL:±0.3

6	COVER	1	PBT 4815	UL-94V0(BLACK)
5	HOUSING	1	PBT 4815	UL-94V0(BLACK)
4	PIN	1	H59(COPPER ALLOY)	Ni PLATED
3	TERMINAL	1	C2680 t=0.35	Sn/Ag PLATED
2	CURVE PIECE	1	C5191 t=0.25	Sn/Ag PLATED
1	PIN TERMINAL	1	C2680 t=0.35	Sn/Ag PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

Specifications
Current Rating: 2.5A or 5.0A
Voltage Rating: 24V DC
Contact Resistance: 50m ohm. Max.
Insulation Resistance: 100M ohm. min.
Withstanding Voltage: 500V AC For One Minute
Operating Temperature Range: -25°C ~ +85°C

AAACONN

RoHS Compliant

TOLERANCES ARE

DRAWING BY	X.±
CHECKED BY	.X±
UNIT / mm	.XX±
SCALE 1 : 1	.XXX±
DATE	ANG±
SIZE A4	P PROJECTION



ORDER INFORMATION

DCPJ-102A-x

SERIES H: HIGH CURRENT RATING

AAA (HK) Electronics Co., Ltd.
www.aaaconnectors.com

Description: DC Power Jack 2.00mm ID, 6.50mm OD Through Hole, Right Angle