
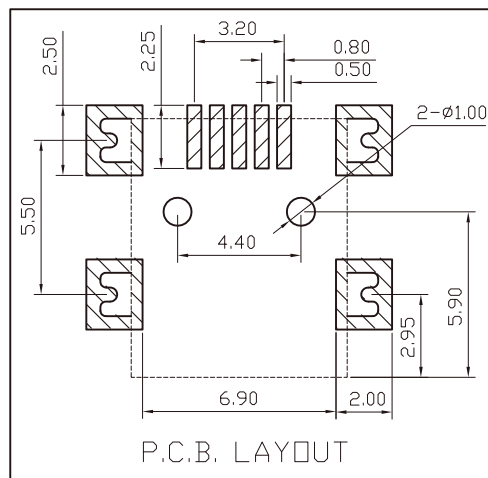

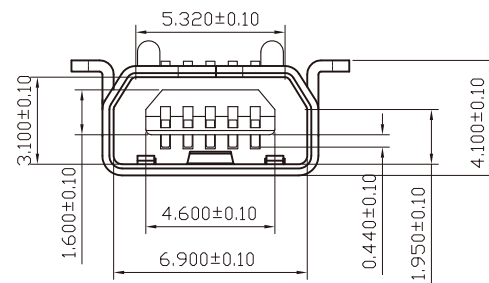
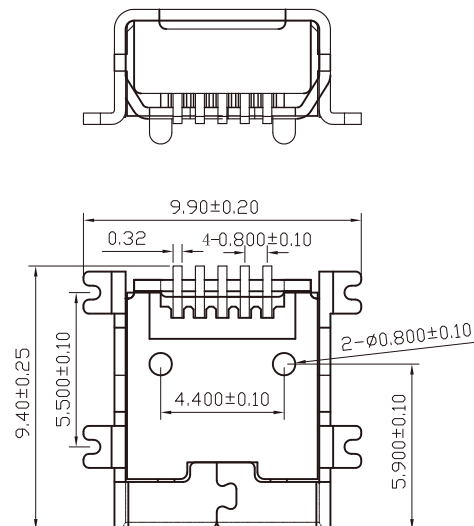


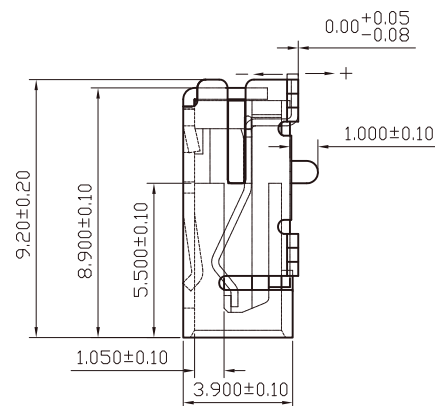

Specifications

Current Rating: 1.5A AC/DC

Voltage Rating: 30V AC/DC

Contact Resistance: 30m ohm. Max.

Insulation Resistance: 1000M ohm. min.

Withstanding Voltage: 500V AC For One Minute

Operating Temperature Range: -55°C ~ +105°C

Material And Finish

Insulator: Thermoplastic(LCP) UL94V-0

Contact: Brass or Copper Alloy

Plating: Gold Plated on Contact Area, Tin Plated on Solder Tail.

Shell: Brass or Copper Alloy, Nickel Plated

AAACONN

AAA (HK) Electronics Co., Ltd.

www.aaaconnectors.com

RoHS Compliant

DRAWING BY

CHECKED BY

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE


X. ±

.X ±

.XX ±

.XXX ±

ANG ±



ORDER INFORMATION

USB-MINIB-HSM-5-x-x

SERIES

4 POSITION
HORIZONTAL SMT 90°

INSULATOR COLOR: 1=BLACK, 2=WHITE, 3=BLUE, 4=BEIGE
SHELL & CONTACT: 1=BRASS, 2=COPPER ALLOY

Description: USB - mini B USB 2.0 Receptacle Connector 5 Position Surface Mount, Right Angle