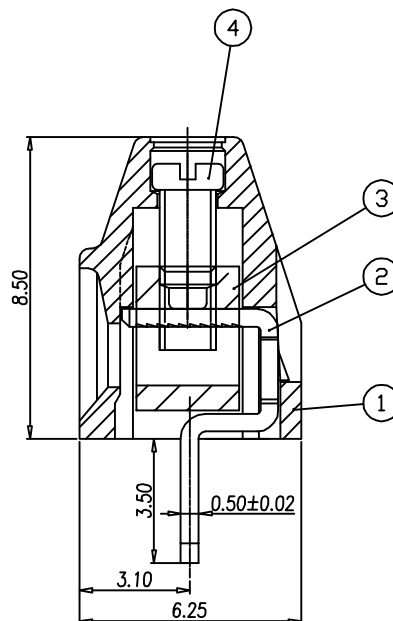
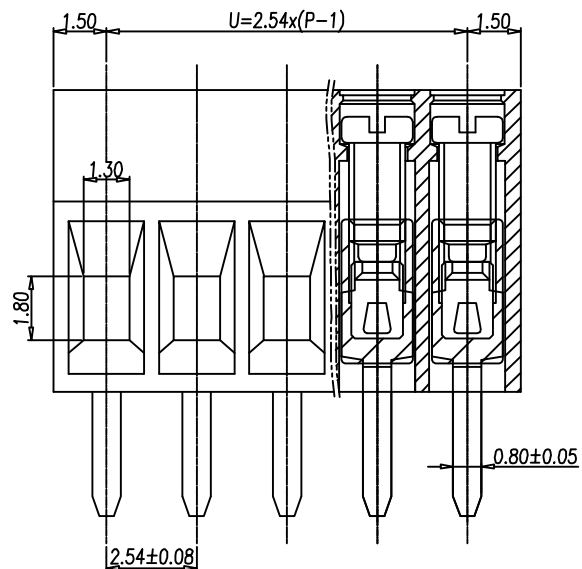


**P.C.B. LAYOUT**

**NOTES:**

1. Rating: UL 150V 8A  
PITCH: 2.54mm
2. Insulation Withstands Voltage:  
AC 1000 V/MIN
3. Insulation Resistance:  
1000MΩ or more at DC500V
4. Using Temperature Range:  
-40°C~+130°C
5. Suitable Electric Wire: AWG28~16
6. Screw Torque Value: 2kgf-cm

| 4    | SCREW        | P    | STEEL                 | M1.6x0.35, Zn Plated     |
|------|--------------|------|-----------------------|--------------------------|
| 3    | WIRECAGE     | P    | BRASS                 | Ni Plated                |
| 2    | CONTACT      | P    | BRASS or COPPER ALLOY | Tin Plated               |
| 1    | HOUSING      | 1    | PA66 UL94V-0          | GREEN, BLACK, BLUE, GREY |
| ITEM | NAME OF PART | Q'TY | MATERIAL              | NOTES                    |

**AAA**CONN


**RoHS Compliant**

TOLERANCES ARE

DRAWING BY .X ±  
CHECKED BY .X ±  
UNIT / mm SCALE 1 : 1 .XXX ±  
DATE ANG ±

SIZE A4

PPOJECTION



**ORDER INFORMATION**

**TBHA-254-xx-xx**

SERIES

INSULATOR COLOR : 1=GREEN, 2=BLACK, 3=BLUE, 4=GREY

CONTACT : 1=BRASS, 2=COPPER ALLOY

POLES : 02-24

PITCH : 2.54mm

Description: Wire to Board Terminal Block Horizontal with Board 2.54mm Through Hole

AAA (HK) Electronics Co., Ltd.

www.aaaconnectors.com