



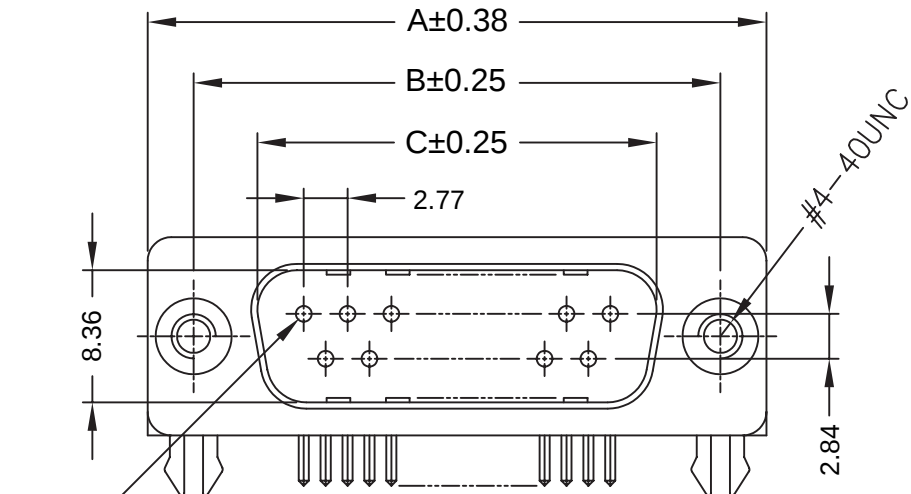

PIN 1

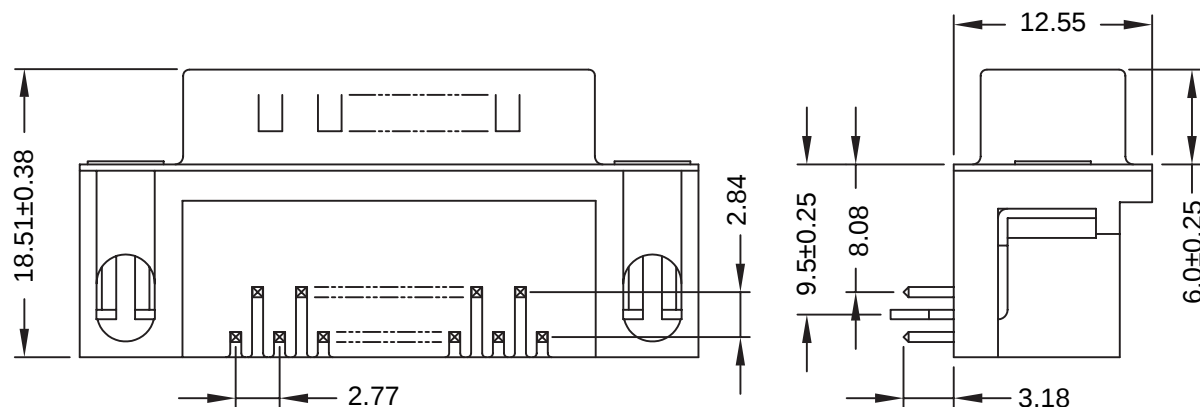


Material:

1. Insulator: P.B.T UL 94V-0
2. Contact: Brass or Copper Alloy
3. Shell: Cold Rolled Steel

Specifications:

1. Current Rating: 5 A
2. Withstanding Voltage: 1000V AC/Minute.
3. Contact Resistance: 15 mOhm max.
4. Insulation Resistance: 1000 mOhm min.
5. Operating Temperature: -55°C to 105°C (upto +125°C for high temp)

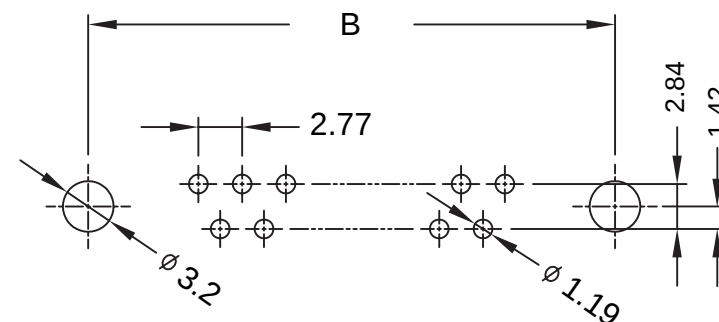

Recommend P.C.B. Layout

POS.	A	B	C
9	30.80	24.99	16.92
15	39.14	33.32	25.25
25	53.04	47.04	38.96
37	69.32	63.50	55.40

AAACONN


AAA (HK) Electronics Co., Ltd.

www.aaconnectors.com

RoHS Compliant


TOLERANCES ARE

DRAWING BY	X. ±
CHECKED BY	.X ± 0.30
UNIT / mm	.XX ± 0.15
SCALE 1 : 1	.XXX ±
DATE	ANG ±
SIZE A4	PPOJECTION



ORDER INFORMATION

182-MD-xx-xx-xx

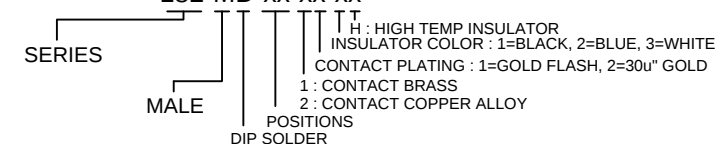

Description: D-Sub Connector Plug Male Pins R/A DIP Solder