
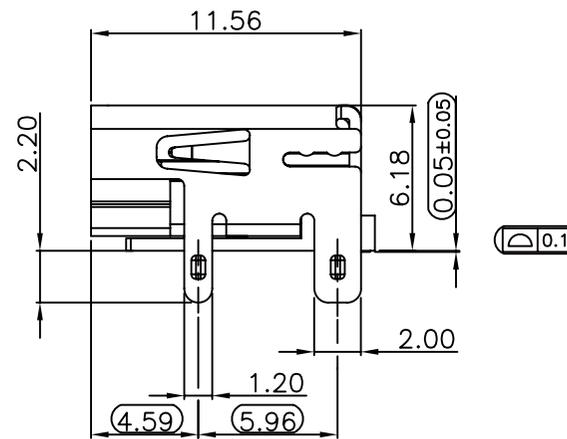
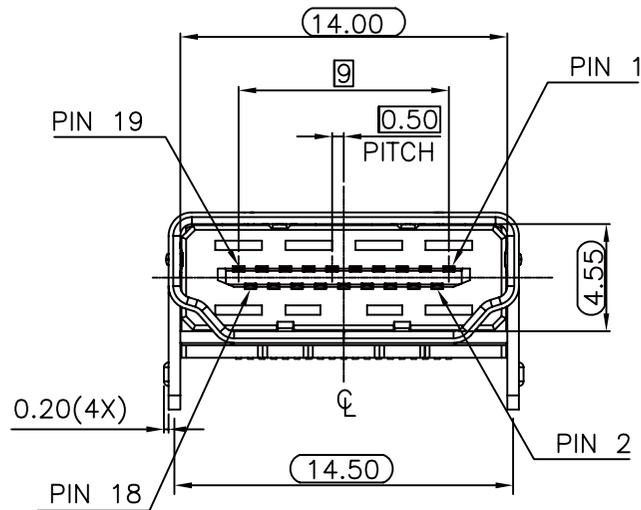


Specifications

Current Rating: 0.5A AC/DC
 Voltage Rating: 40V AC/DC
 Contact Resistance: 30m ohm. Max.
 Insulation Resistance: 100M ohm. min.
 Withstanding Voltage: 500V AC For One Minute
 Operating Temperature Range: -25°C ~ +85°C

Material And Finish

Insulator: Thermoplastic(LCP) UL94V-0 Black
 Contact: Brass or Copper Alloy
 Plating: Gold Plated on Contact Area, Tin Plated on Solder Tail.
 Shell: Brass or Copper Alloy, Nickel Plated



AAACONN


AAA (HK) Electronics Co., Ltd.

www.aaaconnectors.com

RoHS Compliant

TOLERANCES ARE

DRAWING BY	SCALE 1:1	X, ±
CHECKED BY		.X ±
UNIT/ mm	PPOJECTION	.XX ±
DATE		.XXX ±
SIZE A4		ANG ±




ORDER INFORMATION


HDMI-H-SMT19-x-x

SERIES | CONTACT PLATING: 1=GOLD FLASH, 2=15u" GOLD, 3=30u" GOLD
 SHELL & CONTACT: 1=BRASS, 2=COPPER ALLOY
 SMT 19 POSITION
 HORIZONTAL 90°


Description: HDMI Receptacle Connector 19 Position Surface Mount, Right Angle; Through Hole (1/2)

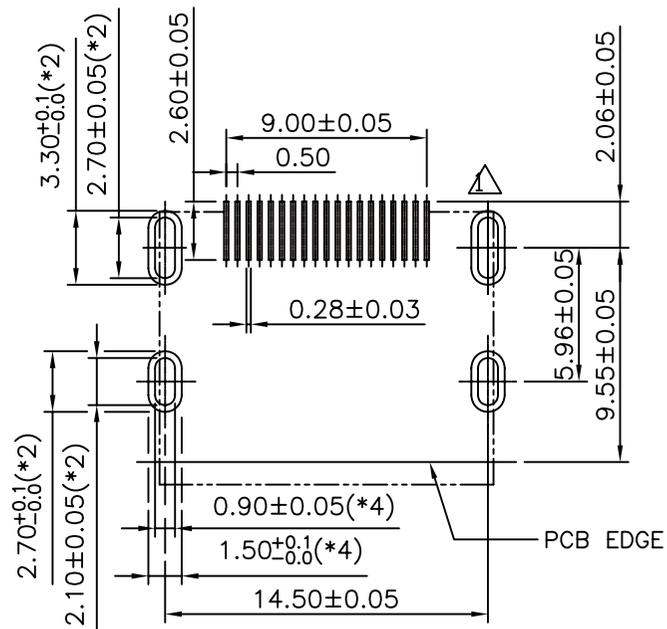

RECOMMENDED PCB LAYOUT (THICKNESS=1.6±0.15mm)
TOLERANCES: ±0.05mm

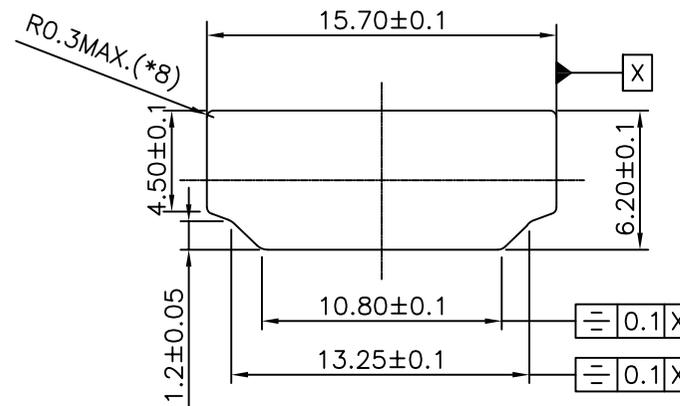

REFERENCE PANEL CUT OUT DIMENSION

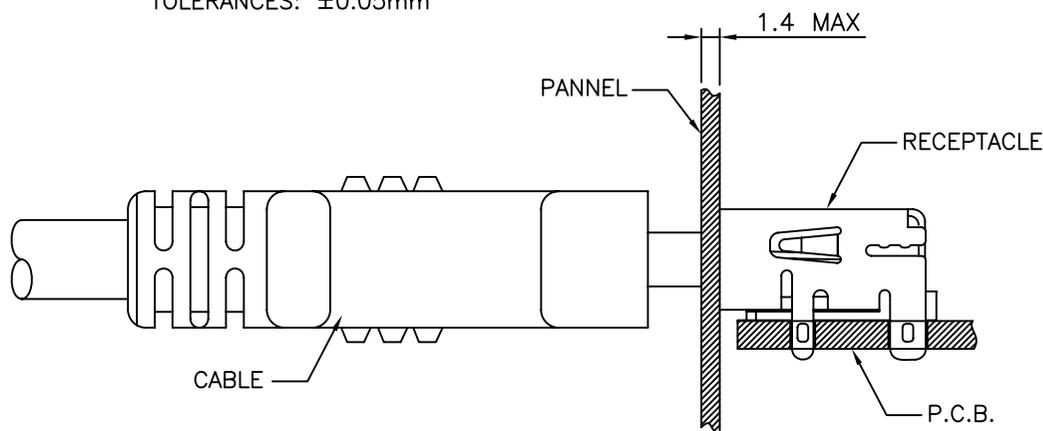

REFERENCE MOUNT DIMENSION

AAACONN


AAA (HK) Electronics Co., Ltd.

www.aaaconnectors.com

RoHS Compliant

TOLERANCES ARE

DRAWING BY	X, ± .XX ± .XX ± .XXX ± ANG ±
CHECKED BY	
UNIT/ mm	SCALE 1 : 1
DATE	
SIZE A4	P PROJECTION



ORDER INFORMATION

HDMI-H-SMT19-x-x

SERIES

CONTACT PLATING: 1=GOLD FLASH, 2=15u" GOLD, 3=30u" GOLD

SHELL & CONTACT: 1=BRASS, 2=COPPER ALLOY

SMT 19 POSITION

HORIZONTAL 90°

Description: HDMI Receptacle Connector 19 Position Surface Mount, Right Angle; Through Hole (2/2)