


6	HOUSING	1	PBT 4815	UL-94V0(BLACK)
5	AXIS SUPPORT	1	C2680	MB:Cu Ni PLATED
4	PIN	1	C2680	MB:Cu Ni PLATED
3	SPRING	1	C5191	MB:Cu Ag/Sn PLATED
2	CURVE PIECE	1	C2680	MB:Cu Ag/Sn PLATED
1	FLAT PIECE	1	C2680	MB:Cu Ag/Sn PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK



Specifications
 Current Rating: 5.0A
 Voltage Rating: 24V DC
 Contact Resistance: 30m ohm. Max.
 Insulation Resistance: 100M ohm. min.
 Withstanding Voltage: 500V AC For One Minute
 Operating Temperature Range: -25°C ~ +70°C

AAACONN

AAA (HK) Electronics Co., Ltd.

www.aaaconnectors.com

RoHS Compliant

DRAWING BY

CHECKED BY

UNIT/mm SCALE 1:1

DATE

SIZE A4

PJECTION

TOLERANCES ARE

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±




ORDER INFORMATION

DCPJ-005A

SERIES PRODUCT NUMBER

Description: DC Power Jack 2.00mm ID, 5.70mm OD Through Hole

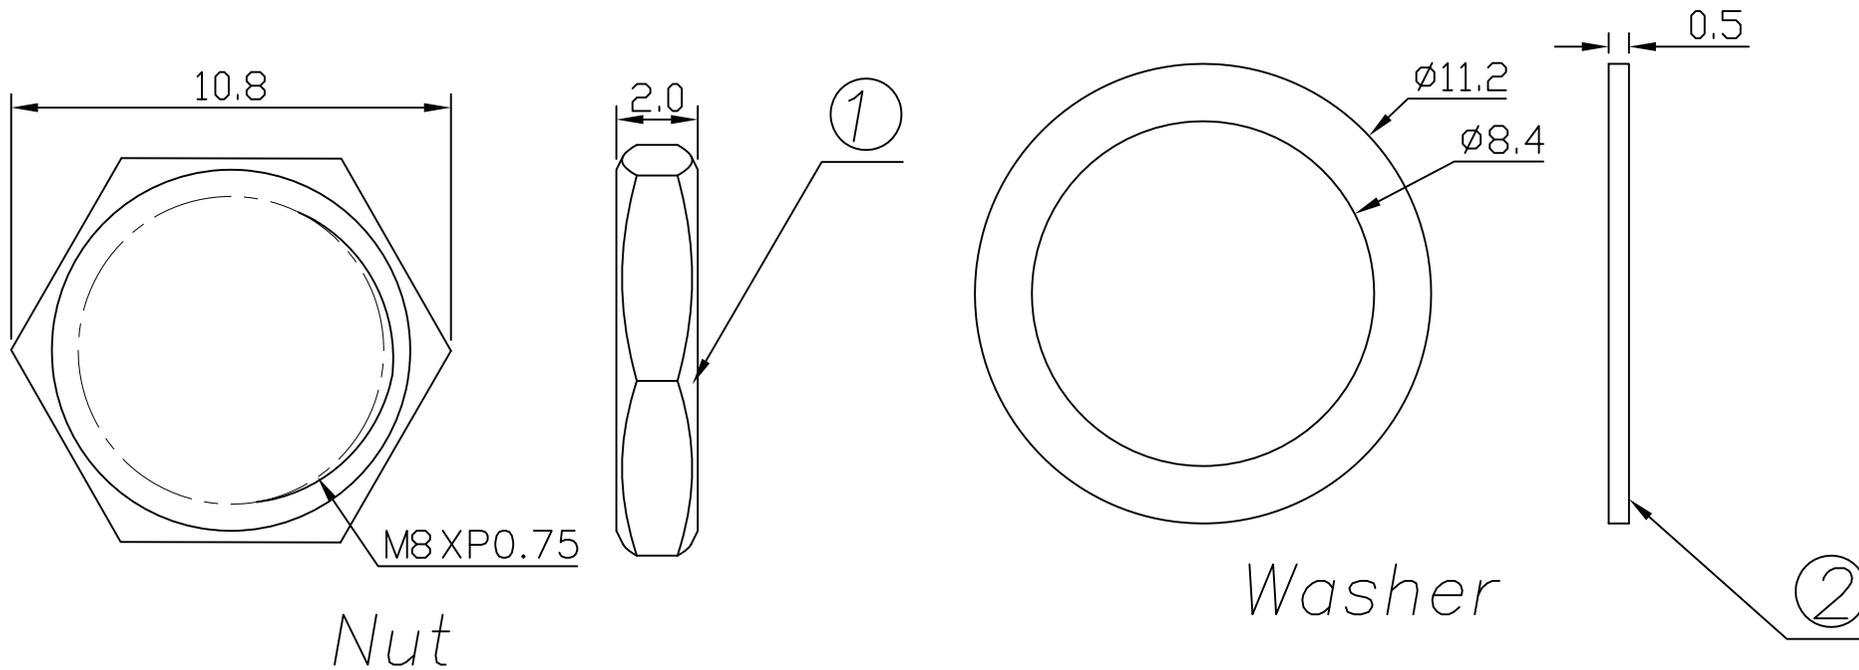

Nut

Washer

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3

2	WASHER	1	H59(COPPER ALLOY)	MB:Cu	Ni	PLATED
1	NUT	1	H59(COPPER ALLOY)	MB:Cu	Ni	PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK		

AAACONN

AAA (HK) Electronics Co., Ltd.

www.aaaconnectors.com

RoHS Compliant

TOLERANCES ARE

DRAWING BY	X. ± .X ± .XX ± .XXX ± ANG ±
CHECKED BY	
UNIT/ mm	SCALE 1:1
DATE	
SIZE A4	P PROJECTION



ORDER INFORMATION

DCPJ-005A

SERIES PRODUCT NUMBER

Description: DC Power Jack 2.00mm ID, 5.70mm OD Through Hole