


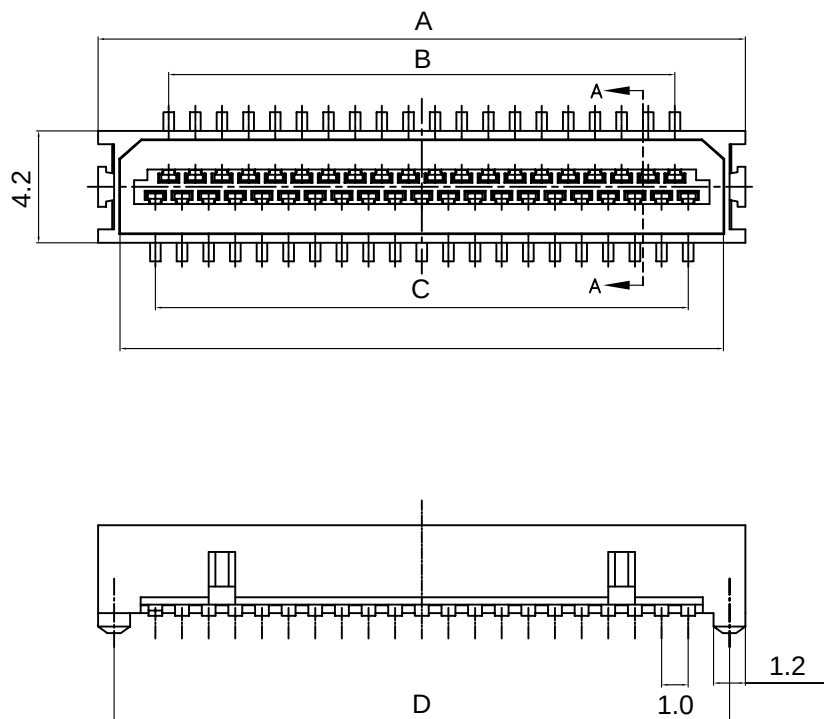

SPECIFICATIONS:

Material

1. INSULATOR: LCP
2. TERMINAL: PHOSPHOR BRONZE

Plating

TERMINAL: Tin Plating

Electrical

- 1.Current rating: 0.5A Per contact
- 2.Volitage rating: 150V AC
- 3.Dielectric withstanding voltage: 250V AC
- 4.Insulation resistance: 500M ohms min
- 5.Contact resistance: 50 milli ohms Max

No. of Contacts	A	B	C	D
9	8.3	3	4	7.1
11	9.3	4	5	8.1
13	10.3	5	6	9.1
15	11.3	6	7	10.1
17	12.3	7	8	11.1
19	13.3	8	9	12.1
21	14.3	9	10	13.1
23	15.3	10	11	14.1
25	16.3	11	12	15.1
31	19.3	14	15	18.1
41	24.3	19	20	23.1
51	29.3	24	25	28.1

AAACONN

AAA (HK) Electronics Co., Ltd.

www.aaaconnectors.com

RoHS Compliant

TOLERANCES ARE

DRAWING BY X. ±
CHECKED BY X. ±
UNIT / mm SCALE 1 : 1 .XX ±
DATE .XXX ±
SIZE A4 PPOJECTION ANG ±

ANG ±

SIZE A4 PPOJECTION

ORDER INFORMATION

DF9-M-xx-PA
SERIES | T | A : Without metal fitting
MALE | P : POST
POSITIONS

Description: 1.00mm Board to Board Connector Header A Type