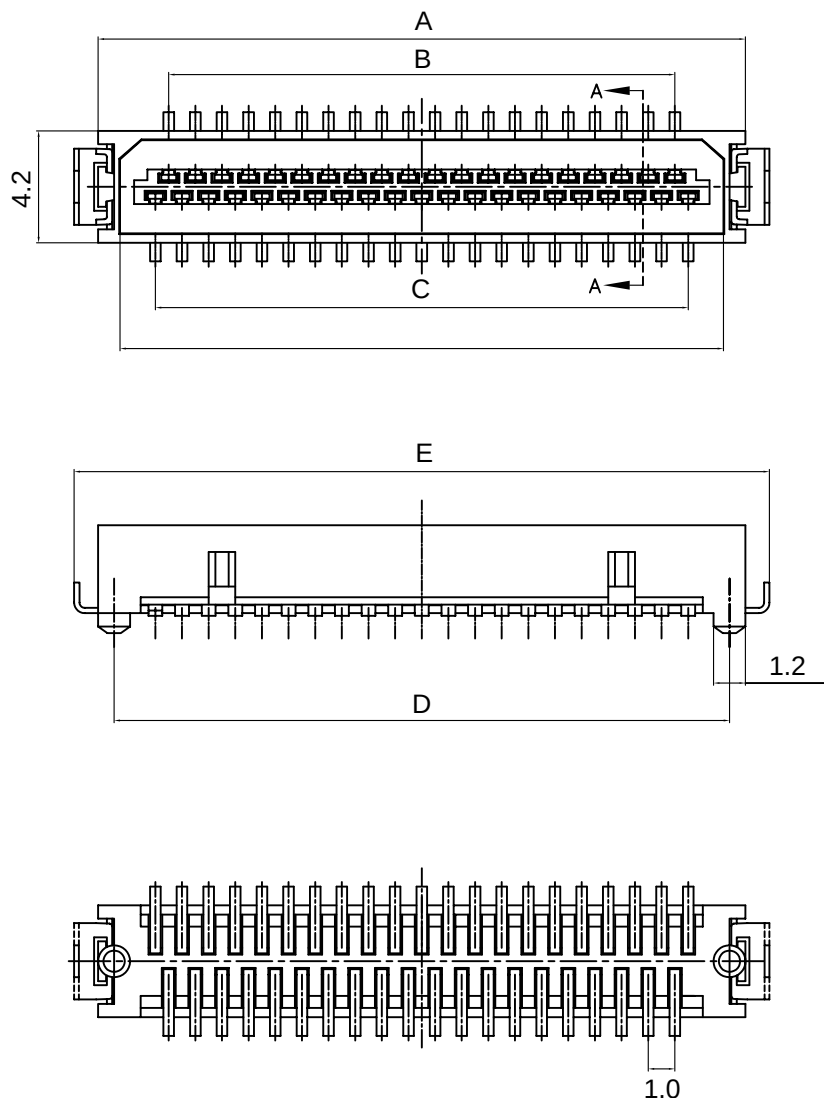


SPECIFICATIONS:

Material

1. INSULATOR: LCP
2. TERMINAL: PHOSPHOR BRONZE
3. EAR: BRASS

Plating

1. TERMINAL: Tin Plating
2. EAR: Tin Plating

Electrical

1. Current rating: 0.5A Per contact
2. Voltage rating: 150V AC
3. Dielectric withstanding voltage: 250V AC
4. Insulation resistance: 500M ohms min
5. Contact resistance: 50 milli ohms Max

No. of Contacts	A	B	C	D	E
9	8.3	3	4	7.1	10.1
11	9.3	4	5	8.1	11.1
13	10.3	5	6	9.1	12.1
15	11.3	6	7	10.1	13.1
17	12.3	7	8	11.1	14.1
19	13.3	8	9	12.1	15.1
21	14.3	9	10	13.1	16.1
23	15.3	10	11	14.1	17.1
25	16.3	11	12	15.1	18.1
31	19.3	14	15	18.1	21.1
41	24.3	19	20	23.1	26.1
51	29.3	24	25	28.1	31.1

AAACONN

AAA (HK) Electronics Co., Ltd.

www.aaaconnectors.com

RoHS Compliant

TOLERANCES ARE

DRAWING BY

X, ±

CHECKED BY

.X, ±

UNIT / mm

SCALE 1 : 1

.XX, ±


DATE

.XXX, ±

SIZE A4

PPOJECTION

ANG, ±



ORDER INFORMATION

DF9-M-xx-P
 SERIES | T | P : POST
 POSITIONS
 MALE

Description: 1.00mm Board to Board Connector Header