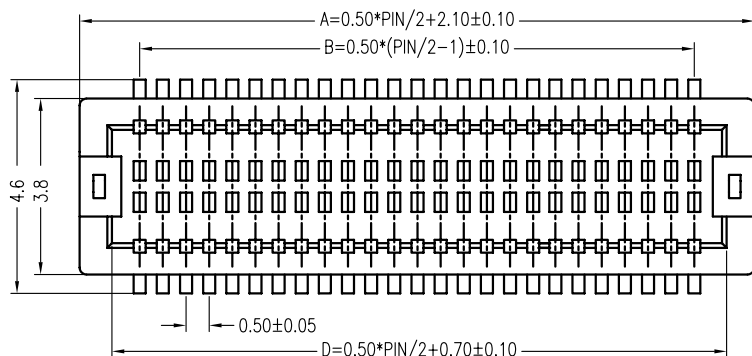




Mating Drawing (Ref)

Specifications:

1. Current Rating : 0.5A AC/DC
2. Voltage Rating : 50V AC/DC
3. Contact Resistance : 30m ohm. max.
4. Insulation Resistance : 100M ohm. min.at 100V DC
5. Withstanding Voltage : 100V AC for one minute
6. Operating Temperature Range : -20°C to +105°C

Material and Plated:

1. Housing : High Temp Plastic (Nylon 46 UL94V-0)
2. Contact : Phosphor Bronze
3. Plated : Gold Plated

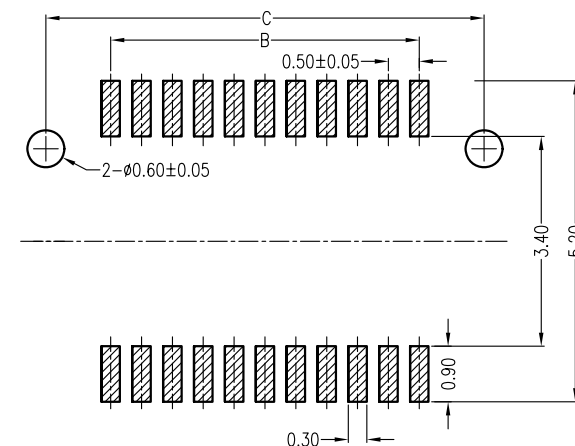

PCB LAYOUT

Dimension

Contact	DIM. A	DIM. B	DIM. C	DIM. D	Contact	DIM. A	DIM. B	DIM. C	DIM. D
10	4.60	2.00	4.10	3.20	30	9.60	7.00	9.10	5.20
12	5.10	2.50	4.60	3.70	32	10.10	7.50	9.60	8.70
14	5.60	3.00	5.10	4.20	36	11.10	8.50	10.60	9.70
16	6.10	3.50	5.50	4.70	40	12.10	9.50	11.60	10.70
20	7.10	4.50	6.60	5.70	50	14.60	12.00	14.10	13.20
22	7.60	5.00	7.10	6.20	60	17.10	14.50	16.60	15.70
24	8.10	5.50	7.60	6.70	80	22.10	19.50	21.60	20.70
26	8.60	6.00	8.10	7.20					

**Mating Dimension

P/N	Plug Height Dim A1	Mating Height Dim H
DF12-M23x-xxx	2.3	3.0
DF12-M28x-xxx	2.8	3.5
DF12-M33x-xxx	3.3	4.0
DF12-M43x-xxx	4.3	5.0

AAACONN

AAA (HK) Electronics Co., Ltd.

www.aaaconnectors.com

RoHS Compliant

DRAWING BY

CHECKED BY

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE


X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±



ORDER INFORMATION

DF12-MxxP-xxx

SERIES

POSITIONS

P:POST

MALE

23:2.3mm

28:2.8mm

33:3.3mm

43:4.3mm

Description: 0.50mm Board to Board Connector Header