


Specifications  
 Current Rating: 1A  
 Voltage Rating: 12V DC  
 Contact Resistance: 50m ohm. Max.  
 Insulation Resistance: 100M ohm. min.  
 Withstanding Voltage: 500V AC For One Minute  
 Operating Temperature Range: -25°C ~ +85°C

Material And Finish  
 Insulator: PBT+15% Glass Filled UL94V-0 Black  
 Cover: Polycarbonate UL94V-0 Clear  
 Contact: Brass or Phosphor Bronze  
 Plating: Silver Plated

**SCHEMATIC**

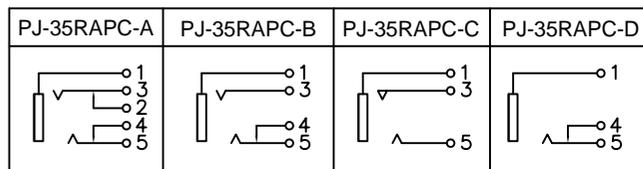

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
7	HOUSING	1	PBT/PA66	
6	COVER	1	POLYCARBONATE	
5	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Plating
4	CURVE PIECE	1	H62 BRASS	Ag-Plating
3	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Plating
2	CURVE PIECE	1	H62 BRASS	Ag-Plating
1	FLAT PIECE	1	H62 BRASS	Ag-Plating

**AAA**CONN

AAA (HK) Electronics Co., Ltd.

www.aaaconnectors.com

**RoHS Compliant**

TOLERANCES ARE

DRAWING BY	X, ±
CHECKED BY	.X ±
UNIT / mm	.XX ±
SCALE	.XXX ±
DATE	ANG ±
SIZE A4	PPOJECTION



**ORDER INFORMATION**

PJ-35RAPC-x

SERIES

SWITCH OPTIONS: A TYPE, B TYPE, C TYPE, D TYPE

Description: 3.50mm Headphone Phone Jack Stereo/Mono Connector Through Hole